



KAHLES

K864 ULTIMATE COMPETITIVE PERFORMANCE.



8-64x56

Designed to meet the highest standards of F-Class competition, the K864 provides unbeatable precision and an unequalled field of view. Offering championship-level clarity and control, it gives shooters the edge they need to perform at their best.

PRODUCT HIGHLIGHTS

- ◆ Unique ergonomics specifically designed for F-Class demands.
- ◆ True 8x zoom with uncompromised optical performance across the entire adjustment range.
- ◆ VISIONFLEX – Revolutionary optical design with a **64%** wider field of view* and a remarkably generous eyepiece.

FEATURES



Second focal plane



Non-illuminated reticle



Main tube diameter 36 mm



MOA 1/8



Adjustment direction CCW



Top mounted parallax



Windage right



EASYREAD




REVOLUTION INDICATOR



ZEROSTOP




VISIONFLEX

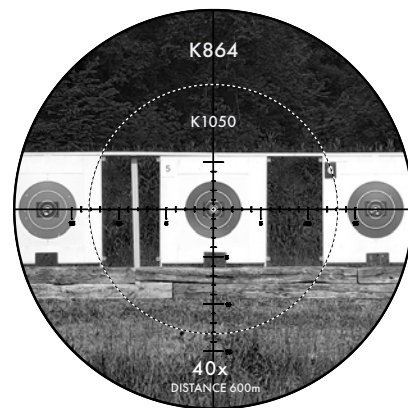

* Based on the comparison to K1050 at 40x.

RETICLES



MOAK+

SCAN TO EXPLORE
OUR PORTFOLIO.



**K A H L E S**

K864

TECHNICAL DATA

Focal plane	SFP
Magnification	8-64
Objective lens diameter (mm)	56
Field of view (ft/100 yds)	18.2-2.4
Exit pupil diameter (mm)	7.1-0.9
Eye relief (mm)	3.62
Diopter compensation (dpt)	+2 / -3
Twilight factor (DIN 58388)	21.2-59.9
Parallax adjustment (m)	8 - ∞
Impact correction / Click E/W	1/8 MOA
Clicks / Revolution E/W	160/160
Adjustment range E/W (MIL)	16/11,6
Adjustment range E/W (in/100 yds)	57.6/42
Adjustment range E/W (MOA)	55/40
Adjustment direction	CCW
Windage	right
Maintube diameter (mm)	36
Length (in)	17.4
Weight (oz)	36.9
Battery type	-
Objective filter thread	M58 x 0.75
Reticles	MOAK+
VISIONFLEX	
EASYREAD	
ZEROSTOP	
Waterproof (ISO9022-8)	
Accessories (optional)	Flip-Up Cover Objective 56 mm / Ocular 52 mm, Sunshield 56 mm, Killflash ARD 56 mm, Parallax Spinner K-1, Throw Lever K-1, Bubble Level 36 mm

SCAN FOR PRICES,
USER MANUAL &
SERVICE SECTION.

